


Assistance Alarm Interface

Designed to meet BS5839-9:2021 & BS8893:2024

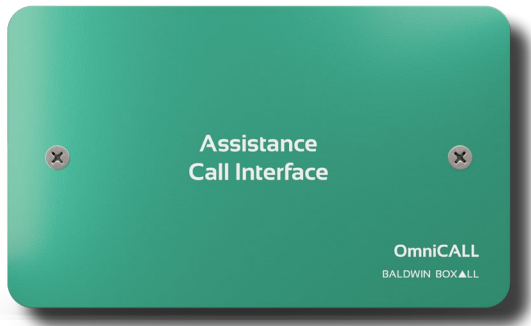

The OCACIF interface enables connection to an assistance alarm in locations where an outstation is not nearby. The interface is powered from the loop or radial circuit, requiring no local power and occupies one address at the Master Station.

OmniCALL

BENEFITS & FEATURES:

- Standard double-gang backbox installation (47mm back box required)
 - Optional surface mount back box
- Self-powered from loop or radial circuit, no local power source is required.
- Green finish available
- Loop or radial connection
- Assistance alarm connection direct to OCACIF

PRODUCT CODES:

- OCACIF – OmniCALL Assistance Alarm Interface

Maintenance Service Contracts Available:


Price on Application

Complimentary Maintenance Log Book Available:

EVC System Maintenance Log Book

SPECIFICATIONS:

Disabled Refuge Remote	
Product code	OCACIF
Power supply	15-36V
Power consumption	30mA @ 24V
Humidity range	0-90% non-condensing
Temperature range	-5°C to +40°C
Indicators	Status
Finish	RAL 6024
Dimensions mm W x H	150 x 90

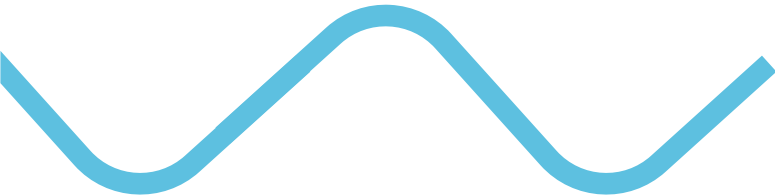



BALDWIN BOXALL

LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk