

Adjust Time & Date on a BVRDTSM Microphone


Product Range:	VIGIL2
Product Code (if applicable):	BVRDTSM
Description of activity:	Adjusting the time and date on the touch screen microphone
Description of likely fault(s):	<ul style="list-style-type: none"> Incorrect time and/or date displayed

IMPORTANT - this product forms part of a life-safety system


Please Note: Periodic inspection and servicing needs to be carried out by a competent person with specialist knowledge of VASs, relevant current training and experience, and with adequate access to spares and sufficient information regarding the system. (BS5839-8).

Description of rectification works:

1. Turn the key clockwise to access Emergency Mode
2. Press and hold the Fault Accept/Lamp Test button for 10 seconds to enter Config mode.

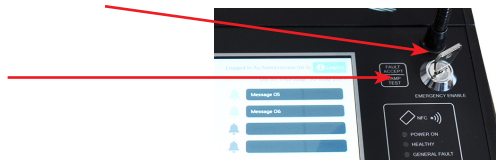


3. Select 'Restart'

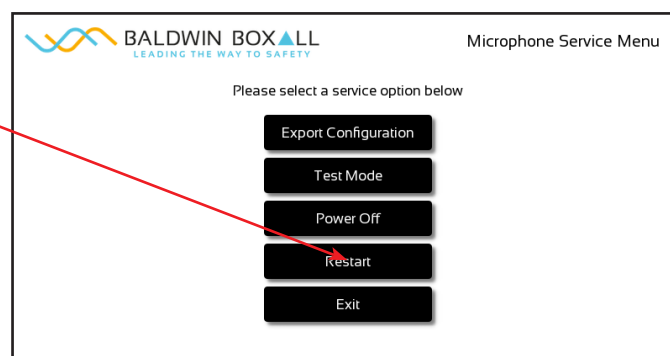

- 3.5 Message displayed will read, 'If you are restarting to enter configuration, please ensure the key is turned.'

4. Enter the PIN code 5555

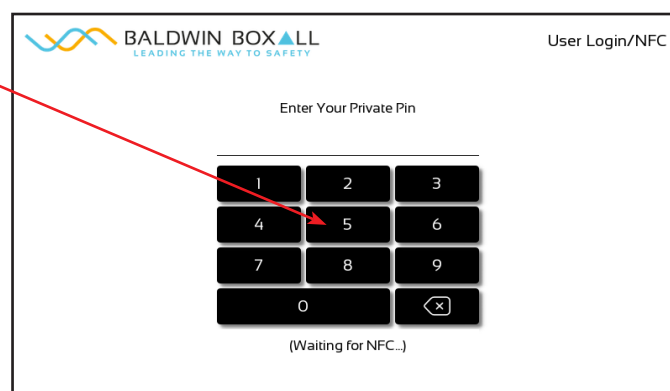

Author:	Technical Dept	Doc Reference:	5.0005
Approved by:	Ashley Wright	Edited by:	Ashley Wright
Release Date:	20/09/19	Updated:	09/12/21

5. Access User Interface, select Time & Date

BALDWIN BOX ALL
LEADING THE WAY TO SAFETY

Microphone Configuration

User Accounts Installation Communication Audio Inputs Bvrdtsm: v1.22
AuxCpu: v1.00

User Interface Monitoring Display Default Names

VA Active Time/Date Firmware Import/Export

Save/Reboot

Back Please read the supplied manual before attempting to change any of the configuration settings. Failure to do so may limit the functionality of the microphone. Exit

6. Use '+' and '-' buttons to adjust date and time

BALDWIN BOX ALL
LEADING THE WAY TO SAFETY

Microphone Configuration

Automatically Synchronise Realtime Clocks Of All Routers: No Bvrdtsm: v1.22
(Local time/date of the microphone will be sent weekly) AuxCpu: v1.00

Day: Month: Year:
Date: 24 - + 10 - + 19 - +
Hour: Min: Sec:
Time: 15 - + 34 - + 00 - + Update RTC

Status: Updating realtime clock, please wait
Status: 24/10/19, 15:34:01
Status: Complete

Save/Reboot

Back Please read the supplied manual before attempting to change any of the configuration settings. Failure to do so may limit the functionality of the microphone. Exit

7. Click 'Update RTC' to accept new date and time entries

BALDWIN BOX ALL
LEADING THE WAY TO SAFETY

Microphone Configuration

Automatically Synchronise Realtime Clocks Of All Routers: No Bvrdtsm: v1.22
(Local time/date of the microphone will be sent weekly) AuxCpu: v1.00

Day: Month: Year:
Date: 09 - + 09 - + 19 - +
Hour: Min: Sec:
Time: 13 - + 30 - + 00 - + Update RTC

Save/Reboot

Back Please read the supplied manual before attempting to change any of the configuration settings. Failure to do so may limit the functionality of the microphone. Exit

8. Once complete, press the Save/Reboot button

BALDWIN BOX ALL
LEADING THE WAY TO SAFETY

Microphone Configuration

Automatically Synchronise Realtime Clocks Of All Routers: No Bvrdtsm: v1.22
(Local time/date of the microphone will be sent weekly) AuxCpu: v1.00

Day: Month: Year:
Date: 09 - + 09 - + 19 - +
Hour: Min: Sec:
Time: 13 - + 30 - + 00 - + Update RTC


Save/Reboot

Back Please read the supplied manual before attempting to change any of the configuration settings. Failure to do so may limit the functionality of the microphone. Exit

9. **IMPORTANT:**
Turn the key to the upright position **BEFORE** proceeding further



10. Confirm Microphone Reboot

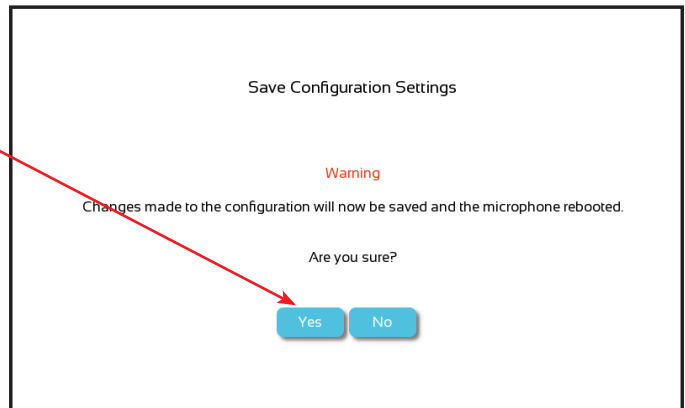

11. On Reboot the fault lights will become illuminated




To clear the fault:

12. Turn the key Clockwise
13. Press and hold the Fault Accept/Lamp Test button for 2 seconds and release



9. Return the key to the upright position



For further help:

Manuals & Guides: technical manuals, installation guides and more are available for download on our website: baldwinboxall.co.uk/downloads.

Telephone: technical help line (0)1892 664422 (then press 3 for after sales technical help).

Training: we hold a range of courses. To find out more, or place a booking, please call us or visit our website: baldwinboxall.co.uk/training.



BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk