

BVRDCIMON

Compliant to BS5839-8:2013 & Certified to BSEN54

CI fire panel monitor module




VIGIL 3

VIGIL 2

BENEFITS & FEATURES:

- EOL Device for closing contact inputs.
- Holds the line at 12V when non-accessed.
- Holds the line at 3V3 when accessed.
- Dimensions (mm) 52H x 109W x 28D.

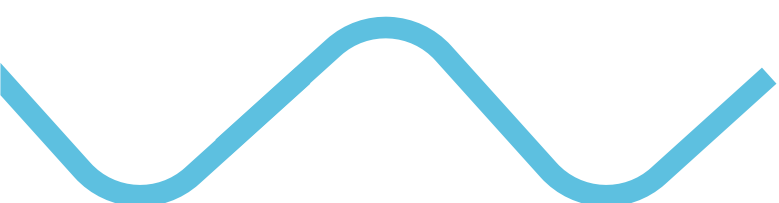

BALDWIN BOX▲LL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk