REFUGE
COMMUNICATION
UNIT

FOR
EMERGENCY
USE ONLY

OPEN

CLOSE

BALDWIN BOXALL

IP65 Enclosure

OmniCare is compliant to BS5839-9:2021

The OmniCare system offers a choice of outstation units which can be wired on the same loop from the control panel.

The BVCRIPBG is an IP65 rated enclosure that enables external mounting of the standard green disabled refuge remote.

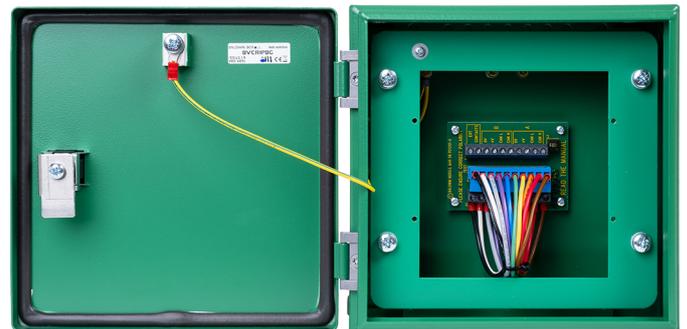Click for more, including links to 'How to' Videos & Guides and related products.

OmniCare

FEATURES:

- IP65 rated enclosure to house a standard green disabled refuge remote (BVOCECPG).

- Robust, quarter turn, handle to open/close.

- Surface mounting.

- Features the same green finish as the refuge remote unit.

- Designed for mounting in refuge areas, such as balconies, which are served directly by a safe route to a storey exit.

- Complete with termination card and internal bezel for easy fitting of the disabled refuge remote.

PRODUCT CODES:

- BVCRIPBG - IP65 rated enclosure.

- BVOCECPG - green refuge remote (standard).

Maintenance Service Contracts Available:

Complimentary Maintenance Log Book Available:

EVC System Maintenance Log Book

EMERGENCY VOICE COMMUNICATION
DISABLED REFUGE

BALDWIN BOXALL
LEADING THE WAY TO SAFETY

OMNICARE IP65 ENCLOSURE SPECIFICATION:

Product code	BVCRIPBG
Finish	RAL 6024
Dimensions mm W x H x D	200 x 200 x 80
Weight kg (without BVOCECPG fitted)	2.22 kg
Fixing holes	4 x 8 mm

SYSTEM REQUIREMENTS:

- A repeater unit (BVOCRIF) must be used if the distance between remotes exceeds 200m.

- Disabled refuge, advance disabled refuge, fire telephone, emergency/steward telephone, combined DRS/fire telephone and emergency assistance alarm units can be placed on the same loop.

- Typically 20-30 remotes per loop.

- Repeater units (BVOCRIF) are used to connect the emergency assistance alarms (DTAKIT) to the system. Up to two (3-part) DTAKITs can be connected to a BVOCRIF. (Alternatively one DTAKIT with an additional pull cord can be installed. Useful for rooms with two points of call, e.g. a toilet cubicle or shower area.)

- No local power required for any outstation, including emergency assistance alarms.

Download Cabling Information

BALDWIN BOXALL
LEADING THE WAY TO SAFETY